


SERIES 3000 THERMAL SLIDING GLASS DOOR



XO • OX • OXXO • OXOR • OXOL • Fixed

Series 3000 retains an AAMA Commercial Grade rating to meet the most demanding specifications. Designed for high-rise residential and condominiums, the 3-1/4" 3000 series is an attractive product for a wide range of applications. Multiple glazing options provide flexibility to meet specific design requirements. A thermal barrier in the frame and sash improves thermal performance enhancing energy saving potential. Offered with a complete line of sub frames, mullions and architectural sills, series 3000 provides the complete solution for your fenestration needs.



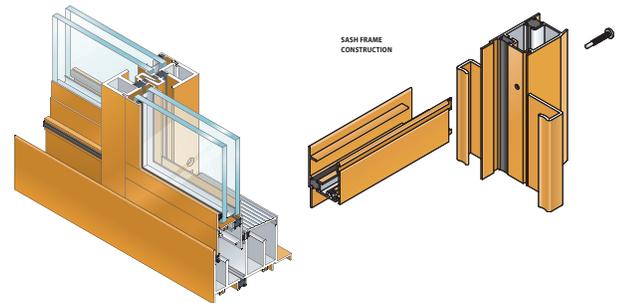


<p>STRUCTURAL LOAD (ASTM E330)</p> <p>VISIT EFCOCORP.COM</p> 	<p>WATER RESISTANCE (ASTM E331)</p> <p>8 PSF</p> 
<p>AIR INFILTRATION (ASTM E283)</p> <p><0.03 CFM/FT²</p> 	<p>CRF (AAMA 1503)</p> <p>58</p> 
<p>U-FACTOR* (ANSI/NFRC 100/200)</p> <p>0.40 - 0.58</p> 	<p>OITC* (ASTM E90 & E413)</p> <p>N/A</p> 
<p>STC* (ASTM E90 & E413)</p> <p>N/A</p> 	<p>FORCED ENTRY (ASTM F588 OR F842)</p> <p>N/A</p> 




STANDARD FEATURES

- Heavy-duty meeting rails
- Sash glides on adjustable tandem steel ball bearing rollers
- Raised sill track
- Cam sash design and continuous interlock meeting rails
- Heavy-duty screen door frames are extruded aluminum alloy with rollers at the head
- Accommodates up to 1" glazing
- Anodized or painted finishes available

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.

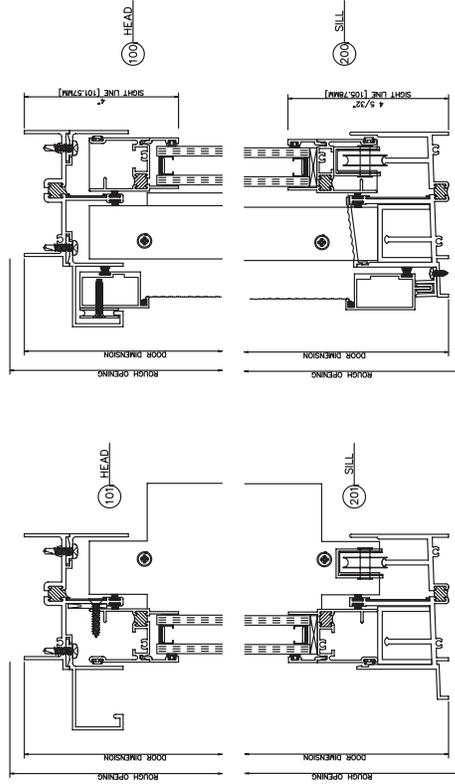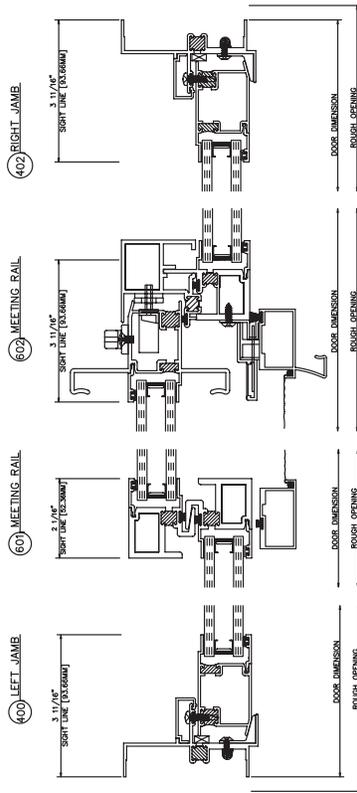

3000 OXO
Inside Glazed

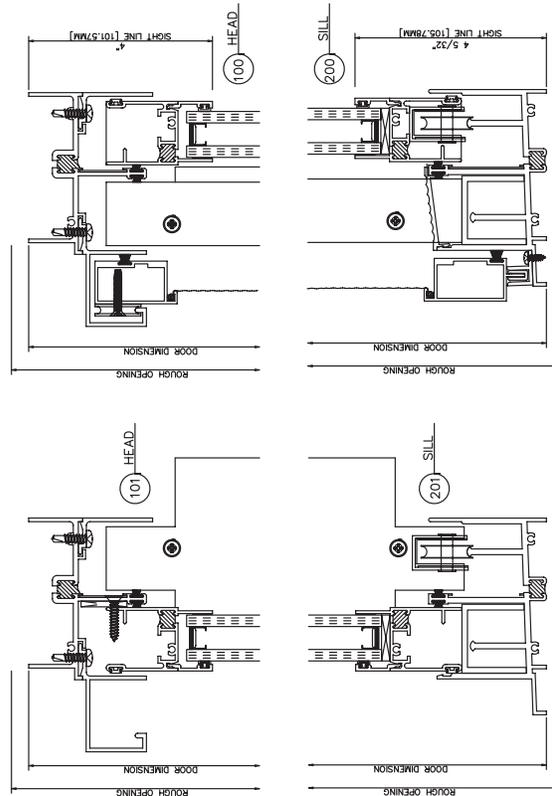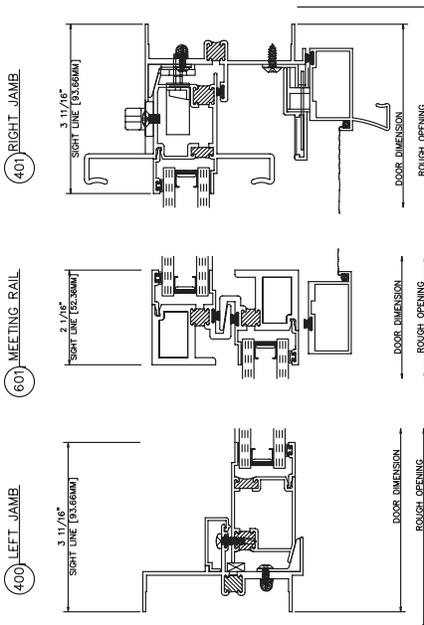


3000 OX
Inside Glazed



3000 Glazing

3000 OXXO

Inside Glazed

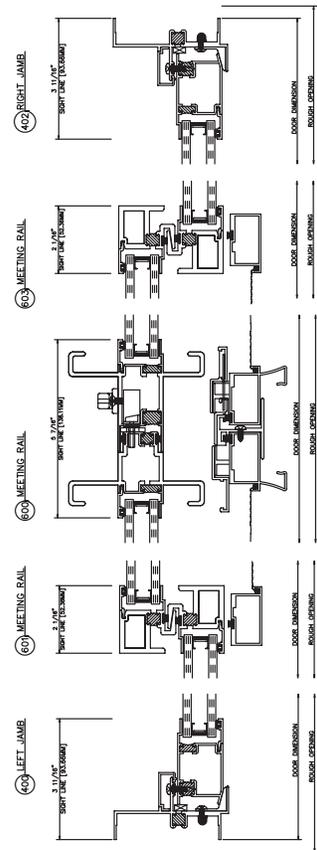

1/4" MONOLITHIC

