


# SERIES 403I STOREFRONT FRAMING



## Shear Block • Screw Spline

Series 403-I is a 2-1/4" X 4-1/2" thermally broken storefront framing system that utilizes EFCO's E-Strut™ thermal isolators. These thermal isolators provide outstanding thermal performance and allow dual finish capability. 403-I is compatible with Thermastile™ doors. This system is designed with two fabrication and erection options, providing even greater versatility.

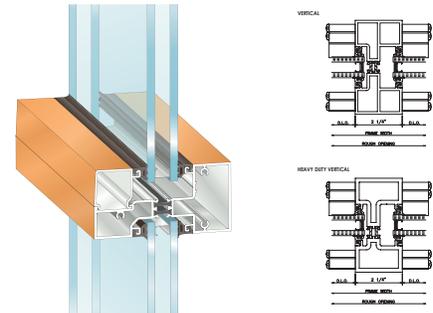

<p><b>STRUCTURAL LOAD</b> (ASTM E330)</p> <p>VISIT <a href="http://EFCOCORP.COM">EFCOCORP.COM</a></p> 	<p><b>WATER RESISTANCE</b> (ASTM E547 &amp; E331)</p> <p>SCREW SPLINE 12 PSF</p> 
<p><b>AIR INFILTRATION</b> (ASTM E283)</p> <p>SCREW SPLINE 0.06 CFM/FT<sup>2</sup></p> 	<p><b>CRF</b> (AAMA 1503)</p> <p>SCREW SPLINE 59</p> 
<p><b>U-FACTOR*</b> (ANSI/NFRC 100/200)</p> <p>SCREW SPLINE 0.35-0.55</p> 	<p><b>OITC*</b> (ASTM E90 &amp; E413)</p> <p>N/A</p> 
<p><b>STC*</b> (ASTM E90 &amp; E413)</p> <p>N/A</p> 	

## STANDARD FEATURES

- E-Strut thermal isolator
- Screw spline construction
- Shear block construction
- 135° inside and outside corners
- Uniform glazing gasket is used for exterior and interior
- Door frame members use thermal struts as a thermal break
- Horizontal stacking members
- Various height intermediate horizontals and sills
- Accommodates up to 1-1/8" glazing
- Accessory options include subframe, pocket fillers, perimeter adaptors, etc.
- Anodized or painted finishes available

\* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.