


SERIES 406 STOREFRONT FRAMING



Screw Spline • Shear Block

Series 406 2" X 6-1/2" extends beyond the standard level of conventional storefronts. An inside and/or outside glazed configuration is available as well as a glazing infill from 3/16" to 1-1/16". Series 406 has a 6 1/2" system depth providing improved structural capability. Series 406 is compatible with all EFCO entrances.

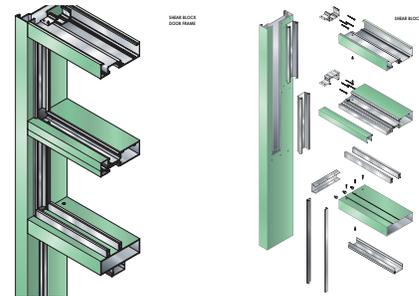

<p>STRUCTURAL LOAD (ASTM E330)</p> <p>→ VISIT EFCOCORP.COM</p>	<p>WATER RESISTANCE (ASTM E547 & E331)</p> <p>SCREW SPLINE 12 PSF SHEAR BLOCK 10 PSF</p>
<p>AIR INFILTRATION (ASTM E283)</p> <p>0.06 CFM/FT²</p>	<p>CRF (AAMA 1503)</p> <p>SHEAR BLOCK 63</p>
<p>U-FACTOR* (ANSI/NFRC 100/200)</p> <p>SHEAR BLOCK 0.38-0.59</p>	<p>OITC* (ASTM E90 & E413)</p> <p>SCREW SPLINE 38</p>
<p>STC* (ASTM E90 & E413)</p> <p>SCREW SPLINE 45</p>	

STANDARD FEATURES

- Thermally broken frames
- Screw spline frame and door side lite frame assembly
- Shear block assembly at door frames
- Uniform glazing gasket is used for exterior and interior
- 2" x 6-1/2" frame size
- Accommodates up to 1-1/8" glazing
- Anodized or painted finishes available

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.