



# SERIES 526 STOREFRONT FRAMING

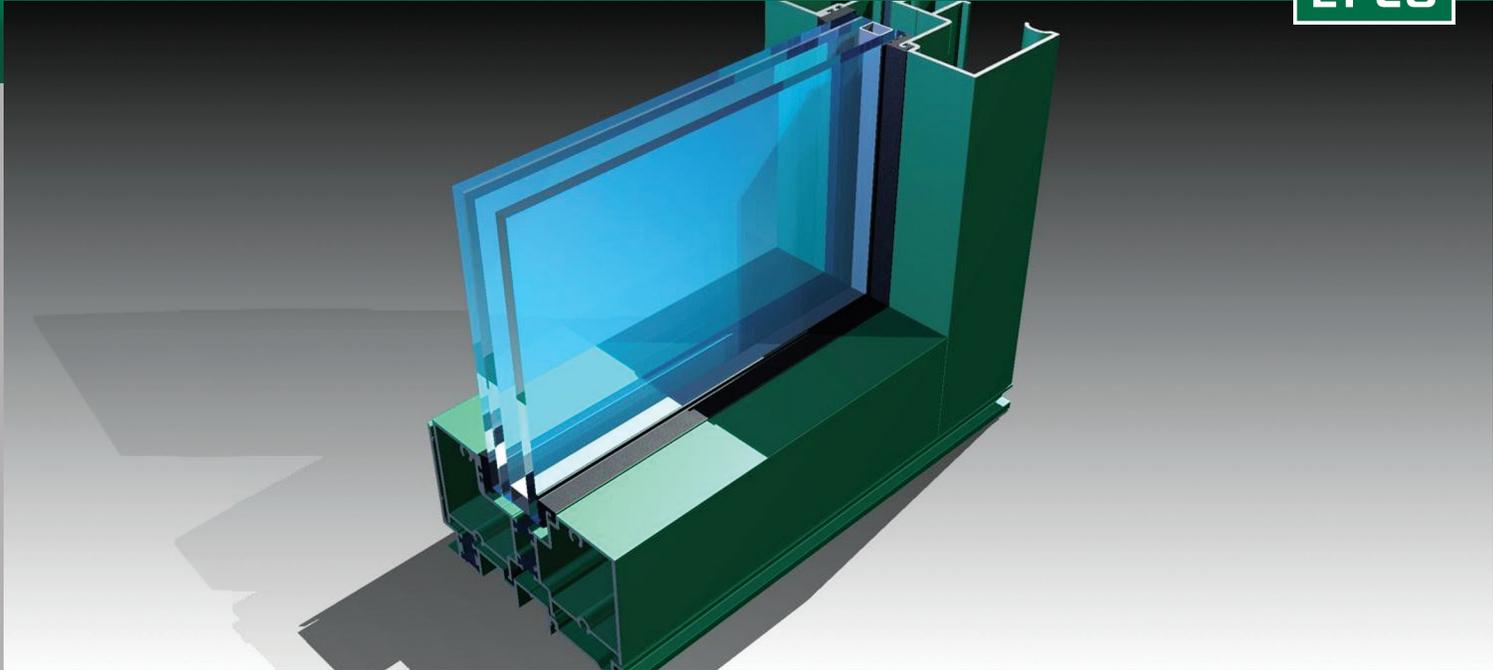

## Outside Glazed • Inside Glazed

Series 526 is a 2-1/2" X 5" impact rated storefront product that incorporates the use of a polyurethane thermal barrier for improved CRF and U values. It can also be used with all standard and heavy duty EFCO impact rated entrance packages. The series 526 has applications for both small and large missile impact resistant "dry gasket" glazing and has been tested for High Velocity Hurricane Zone (HVHZ) with 1 5/16" insulating glass utilizing inboard 9/16" laminated glass with .090" Dupont™ Sentry Glass® Plus interlayer. Florida Product Approvals 13599.8.

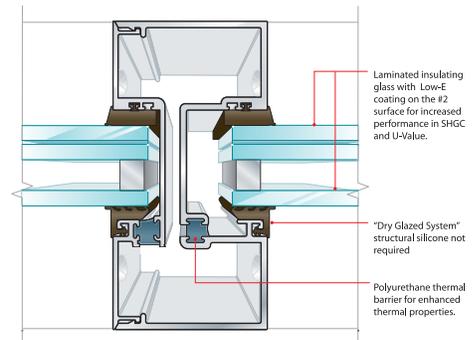

<b>STRUCTURAL LOAD</b> (ASTM E330) VISIT EFCOCORP.COM		<b>WATER RESISTANCE</b> (ASTM E547 & E331) 12 PSF	
<b>AIR INFILTRATION</b> (ASTM E283) <0.06 CFM/FT²		<b>CRF</b> (AAMA 1503) 56	
<b>U-FACTOR*</b> (ANSI/NFRC 100/200) 0.36-0.57		<b>OITC*</b> (ASTM E90 & E413) 32	
<b>STC*</b> (ASTM E90 & E413) 38-39			

## STANDARD FEATURES

- Screw spline construction
- Thermally broken with E-Strut at sill and subsill
- Thermally broken with pour and debridge polyurethane
- Integral door adaptors
- Joint fasteners are #12
- Horizontals are square cut
- Dry Glazed
- Interlocking legs at aubsill
- Head and jamb anchors are inside the glazing pocket
- Accessory line of perimeter anchors, pocket fillers, door adaptors, etc.
- Anodized or painted finishes available

\* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.