


SYSTEM 5600 2" CURTAIN WALL



Outside Glazed

EFCO 2" system 5600 is available in a range of multiple depths from 5" to 7" along with a wide range of face cover depths. Tubular mullions are used vertically and horizontally for shear block construction. The slim 2" sightline offers an aesthetically pleasing look while providing a high performance system tested for a complete range of product applications.

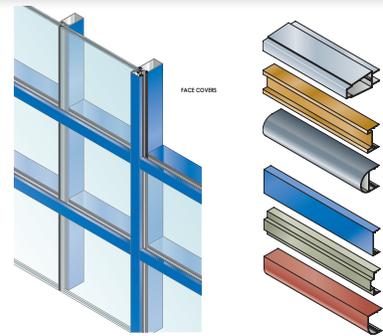

| | |
|--|--|
| <p>STRUCTURAL LOAD (ASTM E330)</p> <p>VISIT EFCOCORP.COM</p>  | <p>WATER RESISTANCE (ASTM E331)</p> <p>VISIT EFCOCORP.COM</p>  |
| <p>AIR INFILTRATION (ASTM E283)</p> <p>VISIT EFCOCORP.COM</p>  | <p>CRF (AAMA 1503)</p> <p>62</p>  |
| <p>U-FACTOR* (ANSI/NFRC 100/200)</p> <p>0.39 - 0.61</p>  | <p>OITC* (ASTM E90 & E413)</p> <p>N/A</p>  |
| <p>STC* (ASTM E90 & E413)</p> <p>N/A</p>  | |

STANDARD FEATURES

- Thermal Isolator used between exterior and interior extrusions
- Various mullion depths available
- Wide variety of snap-on face covers
- Optional corner mullions
- Concealed shear block construction
- Concealed vents
- Integral door adaptors
- Accommodates up to 1-1/4" glazing
- Accessory line of perimeter anchors, pocket fillers, door adaptors, etc.
- Anodized and painted finishes available

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.