


# SERIES 6551 THERMAL HORIZONTAL SLIDING WINDOW 3-7/8" IMPACT/BLAST GRADE



OX • XO • XOX • Fixed

Series 6551 is designed for use in a wide range of applications such as educational, office, and healthcare facilities as well as multi-family residences and condominiums. It has a Florida product approval (Report #12908.1) and has undergone High Velocity Hurricane Zone (HVHZ) testing. It is a fully strutted product, which allows for interior and exterior 2 color option while providing superior thermal qualities and product longevity.

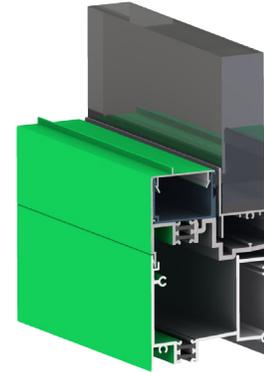

<b>AAMA RATING</b> (A440)  AW-PG65-HS		<b>STRUCTURAL LOAD</b> (ASTM E330)  97.5 PSF	
<b>AIR INFILTRATION</b> (ASTM E283)  < 0.30 CFM/FT <sup>2</sup>		<b>WATER RESISTANCE</b> (ASTM E331)  12 PSF	
<b>U-FACTOR*</b> (ANSI/NFRC 100/200)  N/A		<b>CRF</b> (AAMA 1503)  N/A	
<b>STC*</b> (ASTM E90 & E413)  N/A		<b>OITC*</b> (ASTM E90 & E413)  N/A	
<b>FORCED ENTRY</b> (ASTM F588 OR F842)  GRADE 40		<b>ACCESSIBILITY</b> (AAMA 513)  N/A	

## STANDARD FEATURES

- Thermally isolated system uses EFCO E-Strut
- Continuous interlock at the sash meeting rail
- Accommodates glazing of 9/16", 1", 1-3/16"
- Sash glides on tandem steel ball bearing roller over a raised sill track
- Anodized and painted finishes available

\* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.