


SERIES D200, D300, D500 SWING ENTRANCE DOORS



Narrow Stile (2-1/8") • Medium Stile (3-1/2") • Wide Stile (5")
 EFCO's standard 1-3/4" entrances are designed for educational facilities, shopping centers, offices and other facilities requiring security and egress capabilities. EFCO standard entrances are joint plug welded at every corner to provide superior strength in all applications. Offered in narrow, medium and wide stiles, EFCO standard entrances can accommodate a wide range of applications. Multiple glazing options provide flexibility to meet specific design requirements, and the product's ability to accommodate most hardware applications increases its versatility. EFCO's standard entrances provide the complete solution for your fenestration needs.

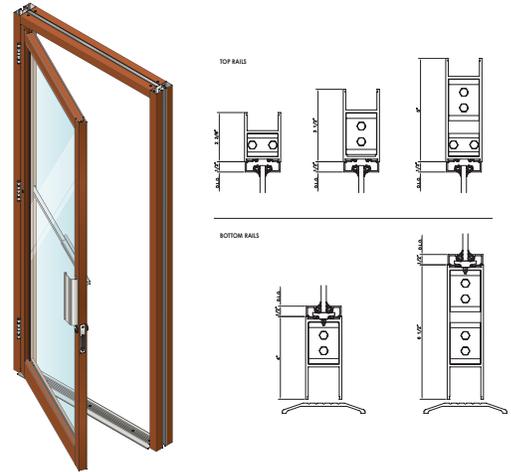


<p>STRUCTURAL LOAD (ASTM E330)</p> <p>VISIT EFCOCORP.COM</p> 	<p>WATER RESISTANCE (ASTM E547 & E331)</p> <p>N/A</p> 
<p>AIR INFILTRATION (ASTM E283)</p> <p><0.5 CFM/FT²</p> 	<p>CRF (AAMA 1503)</p> <p>D300: 30 (406) D300: 25 (5600)</p> 
<p>U-FACTOR* (ANSI/NFRC 100/200)</p> <p>VISIT EFCOCORP.COM</p> 	<p>OITC* (ASTM E90 & E413)</p> <p>N/A</p> 
<p>STC* (ASTM E90 & E413)</p> <p>N/A</p> 	


STANDARD FEATURES

- Bracket reinforced and deep penetration welded corners
- Accepts most major brands of locking hardware and panic devices
- Accommodates up to 1" glazing
- Accommodates all surface mounted, concealed overhead and floor closers
- Tall bottom rails available
- Variety of cross rails, door sweeps, and crash bars available
- Anodized and painted finishes available

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.

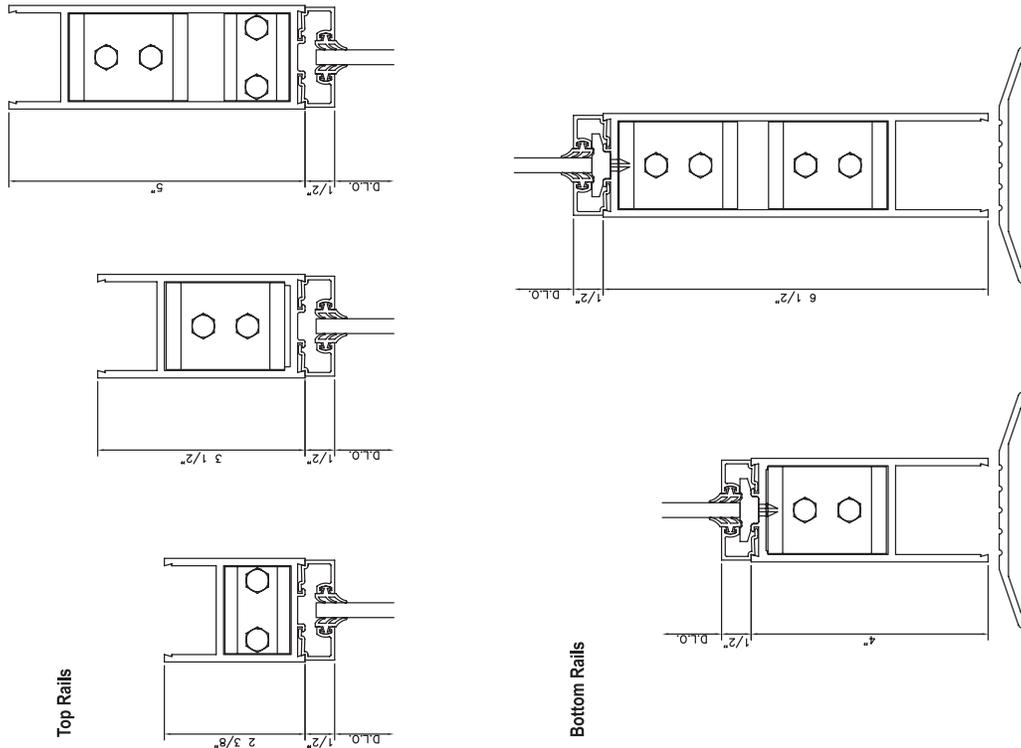

D200 – D500 Top & Bottom Rails

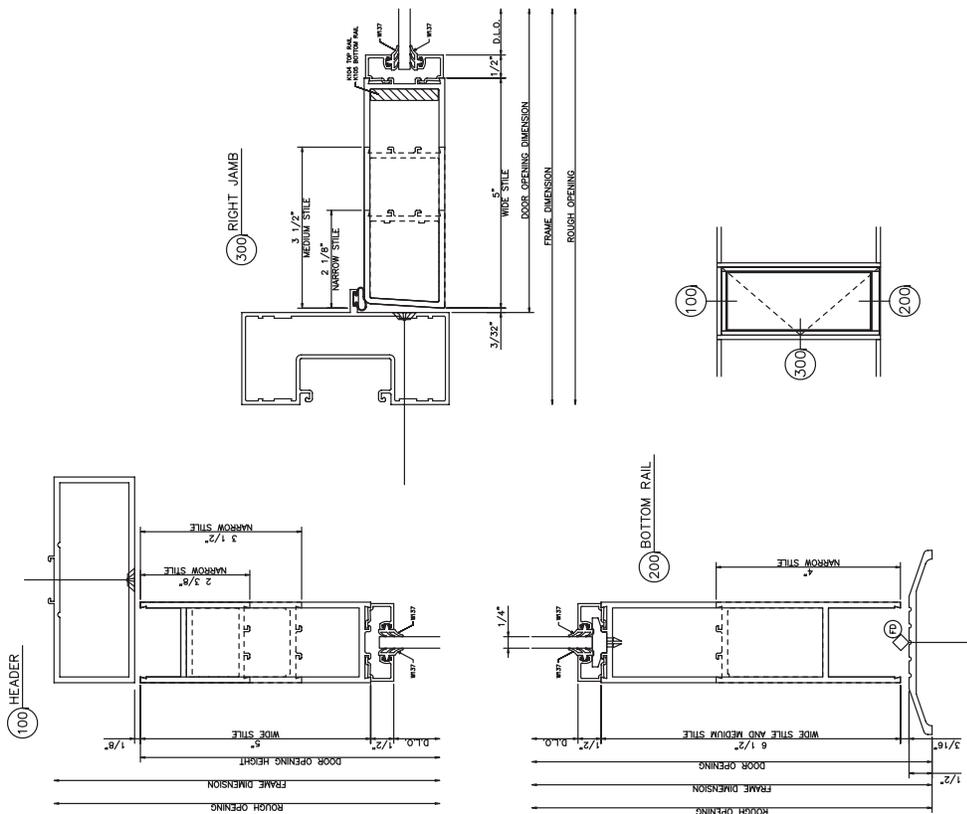


D200, D300, D500




D200, D300, D500 Glazing


1/4" GLAZING




1/4" GLAZING WITH EXTERIOR AND INTERIOR GRID




1/2" GLAZING



1/4" GLAZING WITH EXTERIOR GRID



1" GLAZING



1/4" GLAZING

