


SERIES D318, D518, D618 DURASTILE HEAVY DUTY SWING ENTRANCE DOORS



Medium Stile (3 1/2") • Wide Stile (5") • Wide Stile (6")
 EFCO's 2" DuraStile entrances are designed for educational facilities, detention centers and other facilities requiring security in high abuse traffic locations. Durastile entrances are joint plug welded at every corner to provide superior strength in all applications. Also, multiple glazing options give you flexibility to meet specific design requirements, and the product's ability to accommodate most hardware applications increases its versatility. EFCO's Durastile entrances provide the complete solution for your fenestration needs.

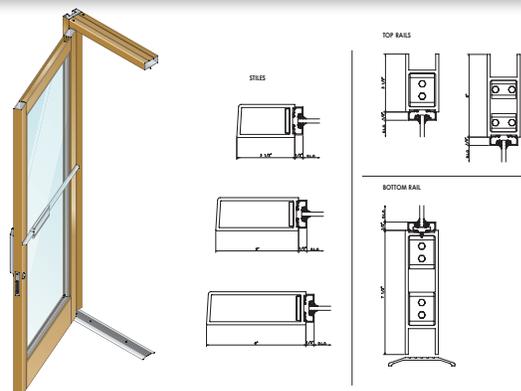

<p>STRUCTURAL LOAD (ASTM E330)</p> <p>VISIT EFCOCORP.COM</p> 	<p>WATER RESISTANCE (ASTM E331)</p> <p>N/A</p> 
<p>AIR INFILTRATION (ASTM E283)</p> <p>D318 & SINGLE D518: <0.3 CFM/FT² D518 DOUBLE: <0.8 CFM/FT²</p> 	<p>CRF (AAMA 1503)</p> <p>N/A</p> 
<p>U-FACTOR* (ANSI/NFRC 100/200)</p> <p>VISIT EFCOCORP.COM</p> 	<p>OITC* (ASTM E90 & E413)</p> <p>N/A</p> 
<p>STC* (ASTM E90 & E413)</p> <p>N/A</p> 	

STANDARD FEATURES

- Bracket reinforced and deep penetration welded corners
- Accommodates up to 1-3/16" glazing
- Accepts most major brands of locking hardware and panic devices
- Accommodates all surface mounted, concealed overhead and floor closers
- Tall bottom rails available
- Variety of cross rails, door sweeps, and crash cars available
- Anodized and painted finishes available

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.