


SERIES SX45 HORIZONTAL SLIDER

4-1/2" HIGH PERFORMANCE THERMAL, ARCHITECTURAL GRADE WINDOW



The SX45 is loaded with options to fit many applications while providing an industry leading U-Factor. The energy efficient design provides a substantial improvement in the interior frame temperatures as well. Designed to meet the increasing demand for thermally superior products needed in schools, government buildings and green construction, EFCO's SX45 horizontal sliding window sets a new standard. The outstanding U-Factor provides demonstrable energy savings when used in conjunction with building envelope performance software.

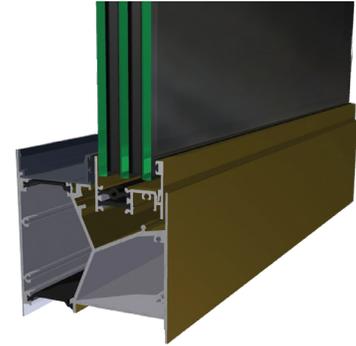

AAMA RATING (A440) AW-PG45-HS		STRUCTURAL LOAD (ASTM E330) 150.4 PSF	
AIR INFILTRATION (ASTM E283) < 0.30 CFM/FT ²		WATER RESISTANCE (ASTM E331) 15 PSF	
U-FACTOR* (ANSI/NFRC 100/200) 0.31 - 0.54		CRF (AAMA 1503) 67	
STC* (ASTM E90 & E413) 33 - 37		OITC* (ASTM E90 & E413) 27 - 33	
FORCED ENTRY (ASTM F588 OR F842) TYPE: A - GRADE 40		ACCESSIBILITY (AAMA 513) N/A	

STANDARD FEATURES

- 4-1/2" frame depth
- XO, OX, OXO, XOX configurations
- 15 lb water
- AW45 standard rating
- AW80 optional rating
- Fully strutted, 2-color availability
- 1-1/2" glass pocket
- U-Factor with EFCO stock glass .34
- Fixed mate, series FX45
 - U-Factor: .31

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.