


SERIES 960 WALL STOREFRONT



Shear Block • Screw Spline

System 960 has a face dimension of 1 3/4" and system depths from 2 3/4" to 8 1/8". The 960 thermal clip storefront system is an exterior glazed system with glazing available from 1/4" to 1 1/16" thick. System 960 is compatible with all EFCO entrances. Two fabrication and erection options are available, providing versatility and labor savings.

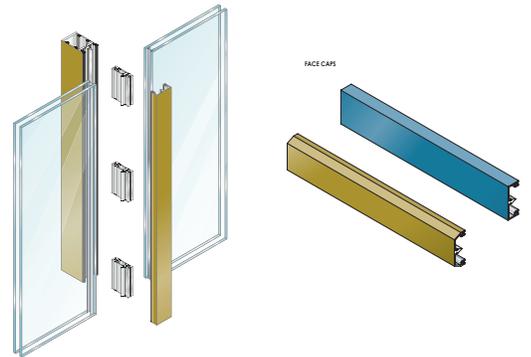

<p>STRUCTURAL LOAD (ASTM E330)</p> <p>VISIT EFCOCORP.COM</p> 	<p>WATER RESISTANCE (ASTM E547 & E331)</p> <p>12 PSF</p> 
<p>AIR INFILTRATION (ASTM E283)</p> <p><0.06 CFM/FT²</p> 	<p>CRF (AAMA 1503)</p> <p>SHEAR BLOCK 65</p> 
<p>U-FACTOR* (ANSI/NFRC 100/200)</p> <p>SHEAR BLOCK 0.29 - 0.51</p> 	<p>OITC* (ASTM E90 & E413)</p> <p>SCREW SPLINE 39</p> 
<p>STC* (ASTM E90 & E413)</p> <p>SCREW SPLINE 45</p> 	

STANDARD FEATURES

- Celcon clip thermal barrier
- Glazing retaining leg on thermal clip
- Face cap
- Vertical mullions accept steel reinforcement
- Butt glazed vertical mullions
- Water deflectors used at intermediate horizontals
- Uniform glazing gasket is used for exterior and interior
- Door framing members available in various system depths
- Accessory line of subframes, pocket fillers, vent adaptors, steel reinforcements, etc.
- Anodized or painted finishes available

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.